



Custom Delay Drop Part Chute Guideskirts (Soft Drop) Form

Drop end CLOSES when mold opens – OPENS when mold closes

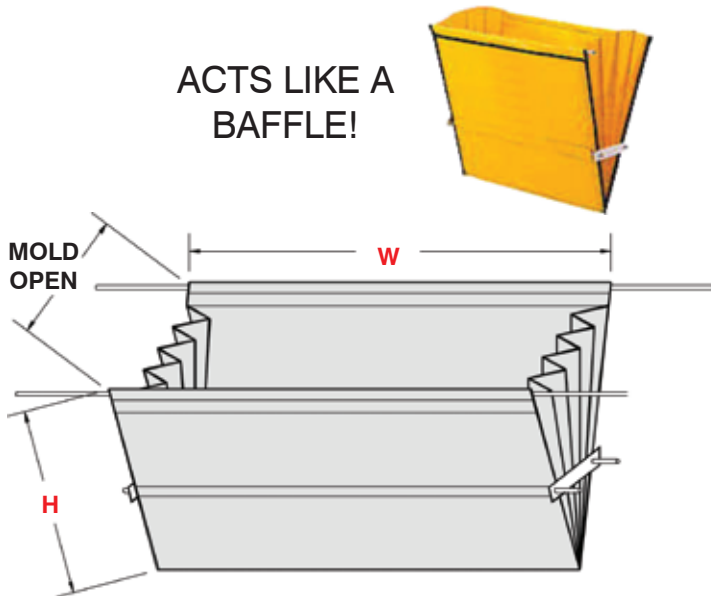

Delayed drops have metal side plates sewn into sides to keep sides rigid.

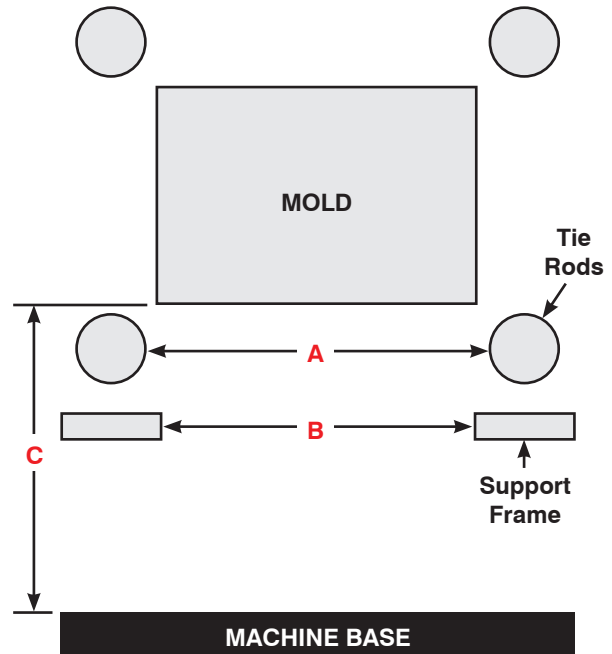

1. Mold Open (daylight): _____
2. (A) Width between tie rods: _____
3. (B) Width between frame: _____
4. (C) Machine clearance mold to base: _____
5. (H) Desired height of guideskirt: _____
6. (W) Desired width of guideskirt: _____
7. Size of parts: _____ L x _____ W x _____ H
8. Number of mold cavities: _____
9. Runner system: No Yes
10. Size of runner: _____ L x _____ W x _____ H
11. Do you require a divider:
 No One Two Three
12. Do you require high temp material (for parts over 180°): No Yes

All dimensions must be completed in order for a Quote to be given.

All guideskirts come with mounting hardware.

Date: _____ Quantity: _____ Phone: (_____) _____ Fax: (_____) _____

Name: _____ Title: _____

Company Name: _____ Email: _____

Address: _____

City: _____ State: _____ Zip: _____



www.imscompany.com

fax order toll-free (USA & Canada)
1.888.288.6900

phone order toll-free (Mexico)
001.888.304.1307

tech support toll-free (USA & Canada)
1.866.467.9001

e-mail
sales@imscompany.com

phone order toll-free (USA & Canada) **1.800.537.5375**

Please refer to imscompany.com for current pricing © Copyright 2021 IMS Company. All rights reserved.