


# Non-Stock Heater Band Form

**SPECIFY:**

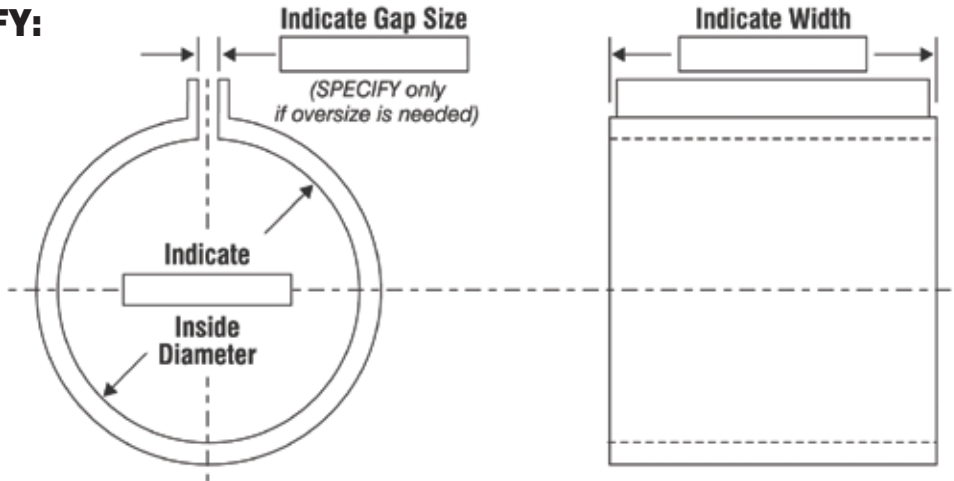

A good rule of thumb for figuring the maximum available heater band wattage:  $3.14 \times \text{band I.D.} \times \text{band width} \times 35$

Quantity: \_\_\_\_\_  
 Mfg. (if known): \_\_\_\_\_  
 Mfg. Part No. (if known): \_\_\_\_\_  
 Wattage: \_\_\_\_\_  
 Voltage: \_\_\_\_\_  
 Type: Nozzle Band  Plastic Proof   
       Key Lock  High Watt Density   
       Adjustable I.D.

**Construction**

One-Piece  Two-Piece   
 Other (describe): \_\_\_\_\_  
 \_\_\_\_\_

**Insulation**

Mica  Compacted Mineral  Ceramic

**Lock-up**

Flange \* Strap \* Key (Wedge)   
 Barrel Nut   
 \* Standard Screws  Spring Bolts

Other (describe): \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**Electrical Connections/Terminations**







Select One Only

**NOTE**

Illustrate location of connection on diagrams above.

Flex Leads:  \_\_\_\_\_ long  
 Flex Leads with Armor Sleeving:  \_\_\_\_\_ long  
 Flex Leads with Braided Wire Sleeving:  \_\_\_\_\_ long

**OR**

Post Terminals:    
 Post Terminals with Terminal Box:    
 Post Terminals with Voltraps:    
 Post Terminals with Terminal Caps:    
 ...  
 Plug Connector (Blade):    
 Plug Connector (European):    
 Expedited 24-48 Hour Service:

**Special**

For holes, cut-outs and notches, indicate size and location on drawings above.

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_ Phone: (\_\_\_\_\_) \_\_\_\_\_ Fax: (\_\_\_\_\_) \_\_\_\_\_  
 Name: \_\_\_\_\_ Title: \_\_\_\_\_  
 Company Name: \_\_\_\_\_ Email: \_\_\_\_\_  
 Address: \_\_\_\_\_  
 City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_